

CLASS 150S IRON TRIM IRON CLIP GATE

- Inside Screw, Rising Stem, All-Iron Trim
- Flanged Ends in accordance with ASME B16.1 Class 125。

Size	Pressure Rating			
1"~2"	150 PSI WSP	225 PSI	WOG	(Non-Shock)
2-1/2"~4"	125 PSI WSP	175 PSI	WOG	(Non-Shock)


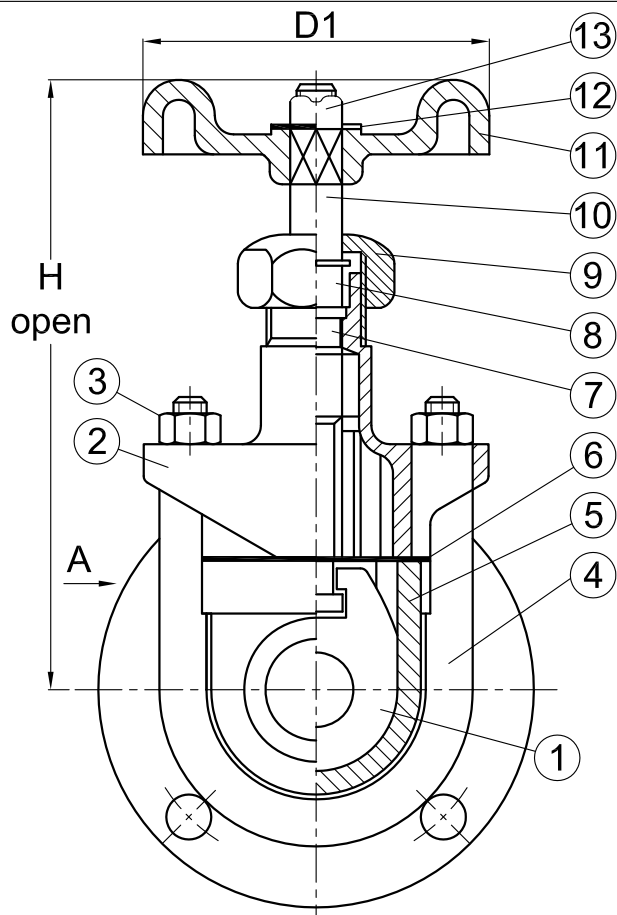


Fig: 458AN

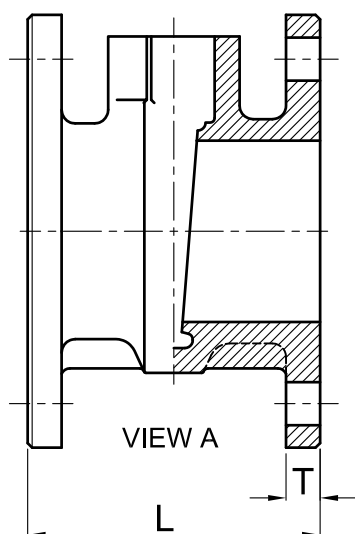

MATERIAL LIST

Item No.	Part	Material	Specification
1 03	Disc	Ductile Iron	ASTM A536
2 02	Bonnet	Ductile Iron	ASTM A536
3 27	Nut	Steel	ASTM A307-A
4 28U	U-Bolt	Steel	ASTM A307-A
5 01	Body	Ductile Iron	ASTM A536
6 14	Gasket	Compressed non-asbestos sheet with Buna-N Nitrile binder	Commercial
7 15	Packing	Graphite	Commercial
8 07	Gland	Stainless Steel	ASTM A276-410
9 06	Packing Nut	Ductile Iron	ASTM A536
10 12	Stem	Stainless Steel	ASTM A276-410
11 05	Hand Wheel	Cast Iron	ASTM A126-B
12 32	Name Plate	Aluminium	
13 27	Wheel Nut	Steel	ASTM A307-A

Nominal Size	Dimensions Unit: inch				Net Wt. lbs.
	H	L	D1	T	
1"	7.50	3.19	2.95	0.32	6
1-1/2"	9.14	3.74	3.75	0.32	10.6
2"	11.58	4.25	3.98	0.32	16
2-1/2"	12.88	4.94	4.75	0.32	23.4
3"	14.77	5.06	6.0	0.37	33.7
4"	19.30	6.75	9.0	0.50	61.7

■ Note: Design and materials are subject to change without notice.



EVER METAL INDUSTRY CO.,LTD