


DUCTILE IRON Y-TYPE SWING CHECK VALVE

- CLASS 300,640CWP/WOG,450psi@650° F MAX.
- STANDARD: MSS SP71,THREADED ENDS-IN ACCORDANCE ASME B1.20.1.
- HYDROTEST: SHELL TEST-975psi.
SEAT TEST-640psi.

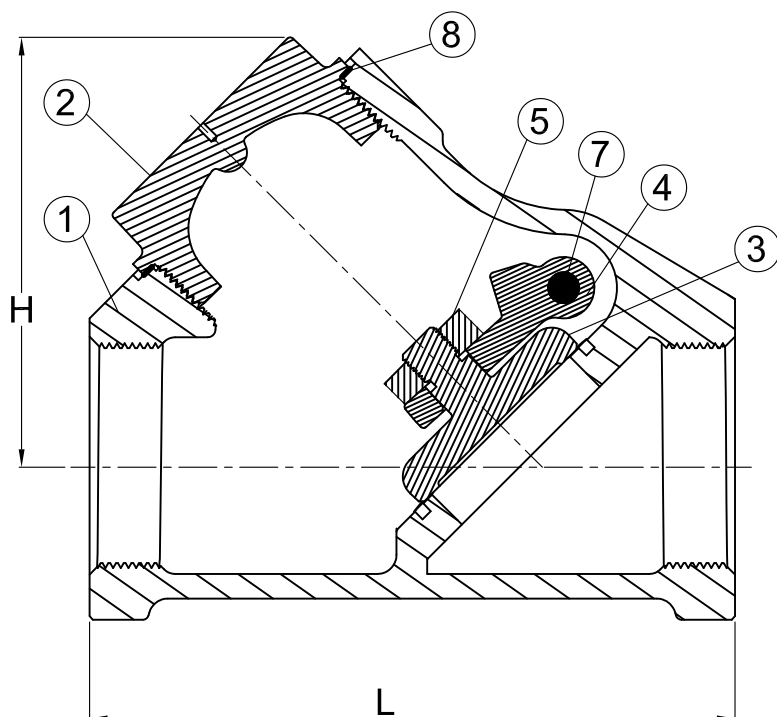

Unit: mm

SIZE	H	L
1/2"	40	70
3/4"	48	83
1"	63	103
1-1/4"	72	120
1-1/2"	84	137
2"	105	168

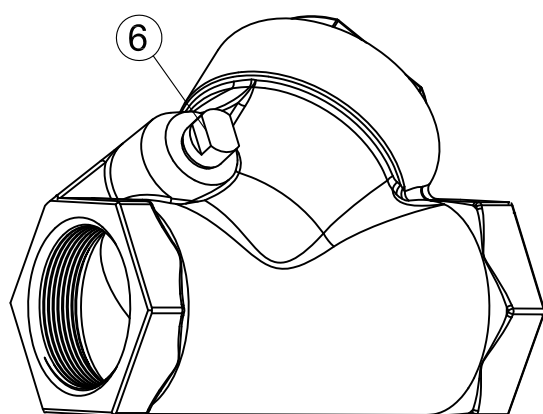


Fig:477A

NO.	Part	Material	Specification
1	Body	Ductile Iron	ASTM A536,65-45-12
2	Cap	Ductile Iron	ASTM A536,65-45-12
3	Disc	Ductile Iron	ASTM A536,65-45-12
4	Hinge	Ductile Iron	ASTM A536,65-45-12
5	Nut	Steel	ASTM A194 2H
6	Plug	SUS 304	AISI 304
7	Pin	SUS 410	AISI 410
8	Gasket	ARAMID FIBER BLEND WITH NITRILE BINDER	

EVA EVER METAL INDUSTRY CO.,LTD