

CLASS 150S BRONZE TRIM IRON CLIP GATE

- Inside Screw, Rising Stem, Solid Wedge, Bronze Mounted
- End Threaded to ANSI B2.1

Size	Pressure Rating			
1/4"~2"	150 PSI WSP	225 PSI WOG	(Non-Shock)	
2-1/2"~4"	125 PSI WSP	175 PSI WOG	(Non-Shock)	


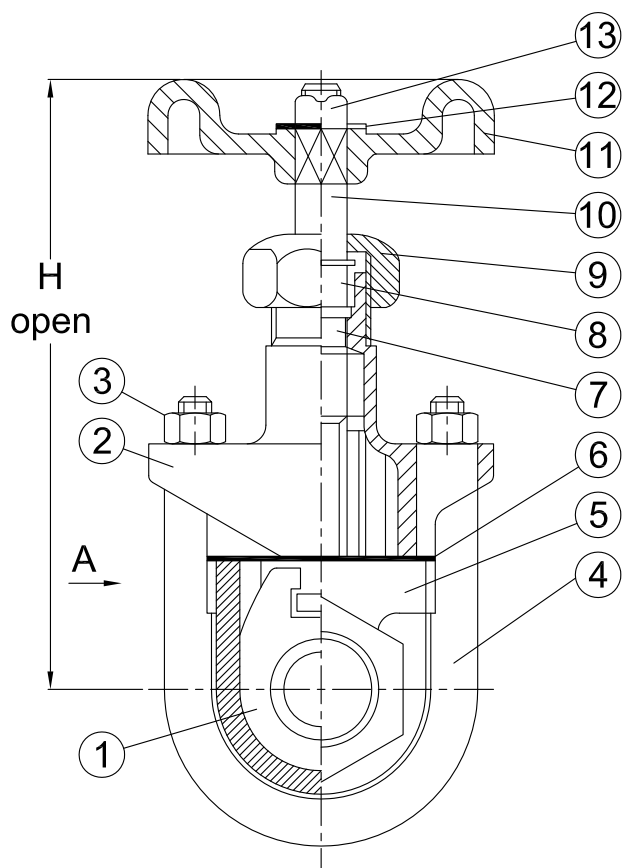


Fig: 457A



VIEW A

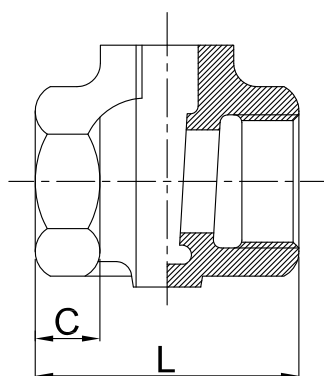

MATERIAL LIST

Item No.	Part	Material	Specification
1	03 Disc	Cast Bronze	ASTM B62
2	02 Bonnet	Ductile Iron	ASTM A536
3	27 Nut	Steel	ASTM A307-A
4	28U U-Bolt	Steel	ASTM A307-A
5	01 Body	Ductile Iron	ASTM A536
6	14 Gasket	Non-Asbestos	
7	15 Packing	Non-Asbestos Packing	
8	07 Gland	Brass	ASTM B16
9	06 Packing Nut	Ductile Iron	ASTM A536
10	12 Stem	Brass	ASTM B16
11	05 Hand Wheel	Cast Iron	ASTM A126-B
12	32 Name Plate	Aluminium	
13	27 Nut	Steel	ASTM A307-A

Nominal Size	Dimensions Unit: inch				Net Wt. lbs.
	H	L	D1	C	
1/4"~1/2"	5.00	2.09	2.13	0.47	1.5
3/4"	6.22	2.52	2.44	0.51	2.0
1"	7.50	2.64	2.95	0.63	3.0
1-1/4"	9.00	2.91	2.95	0.70	5.0
1-1/2"	9.14	3.15	3.75	0.75	6.5
2"	11.58	3.90	3.98	0.75	10.0
2-1/2"	12.88	4.60	4.75	0.90	16.0
3"	14.77	4.92	6.0	0.90	24.0
4"	19.30	5.94	9.0	0.98	48.0

■ Note: Design and materials are subject to change without notice.



EVER METAL INDUSTRY CO.,LTD